

600V Super-Junction Power MOSFET

FEATURES

- $\bullet \quad \text{Very low FOM R}_{\text{DS(on)}} \times \text{Q}_{\text{g}} \\$
- 100% avalanche tested
- RoHS compliant

APPLICATIONS

- Switch Mode Power Supply (SMPS)
- Uninterruptible Power Supply (UPS)
- Power Factor Correction (PFC)



Device Marking and Package Information				
Device	TPA60R7K5C	TPP60R7K5C	TPU60R7K5C	TPD60R7K5C
Package	TO-220F	TO-220	TO-251	TO-252
Marking	60R7K5C	60R7K5C	60R7K5C	60R7K5C

Absolute Maximum Ratings $T_C = 25^{\circ}C$, unless otherwise noted					
Parameter		Value	Value		
raidinetei	Symbol	TO-220, TO-251, TO-252	TO-220F	Unit	
Drain-Source Voltage (V _{GS} = 0V)	V _{DSS}	600		V	
Continuous Drain Current	I _D	1		Α	
Pulsed Drain Current (note) I _{DM}	3		А	
Gate-Source Voltage	V_{GSS}	±30		V	
Single Pulse Avalanche Energy (note2) E _{AS}	0.45		mJ	
Avalanche Current (note1) I _{AR}	0.3		А	
Repetitive Avalanche Energy (note1) E _{AR}	0.01		mJ	
Power Dissipation (T _C = 25°C)	P _D	5.4	2.7	W	
Operating Junction and Storage Temperature Range	T_J,T_stg	-55~+150		°C	

Thermal Resistance				
Parameter	Symbol	Value		Unit
Parameter	Symbol	TO-220, TO-251, TO-252	TO-220F	Onit
Thermal Resistance, Junction-to-Case	R _{thJC}	23	46	IZ AAI
Thermal Resistance, Junction-to-Ambient	R _{thJA}	62	80	K/W

V3.0 www.tsinghuaicwx.com




TPA60R7K5C, TPP60R7K5C, TPU60R7K5C, TPD60R7K5C

Wuxi Unigroup Microelectronics Company

		Value				
Parameter	Symbol Test Conditions		Min.	Тур.	Max.	Unit
Static					!	
Drain-Source Breakdown Voltage	V _{(BR)DSS}	$V_{GS} = 0V, I_{D} = 250\mu A$	600			V
Zoro Coto Voltago Droin Current		$V_{DS} = 600V, V_{GS} = 0V, T_{J} = 25^{\circ}C$			1	
Zero Gate Voltage Drain Current	I _{DSS}	$V_{DS} = 600V, V_{GS} = 0V, T_{J} = 150^{\circ}C$			100	μΑ
Gate-Source Leakage	I _{GSS}	$V_{GS} = \pm 30V$			±100	nA
Gate-Source Threshold Voltage	V _{GS(th)}	$V_{DS} = V_{GS}, I_{D} = 250 \mu A$	2.5		4.0	V
Drain-Source On-Resistance (Note3)	R _{DS(on)}	$V_{GS} = 10V, I_{D} = 0.3A$		6.6	7.5	Ω
Forward Transconductance (Note3)	9 _{fs}	$V_{DS} = 10V, I_{D} = 0.3A$		0.5		S
Dynamic		-		•		
Input Capacitance	C _{iss}	$V_{GS} = 0V,$ $V_{DS} = 50V,$		53		pF
Output Capacitance	C _{oss}			21		
Reverse Transfer Capacitance	C _{rss}	f = 1.0MHz		4		
Total Gate Charge	Q_g			1.5		nC
Gate-Source Charge	Q_{gs}	$V_{DD} = 480V, I_{D} = 1A, V_{GS} = 10V$		0.3		
Gate-Drain Charge	Q_{gd}			0.6		
Turn-on Delay Time	t _{d(on)}			16		
Turn-on Rise Time	t _r	$V_{DD} = 400 \text{V}, I_D = 1 \text{ A},$		30		ns
Turn-off Delay Time	t _{d(off)}	$R_G = 25\Omega$		20		
Turn-off Fall Time	t _f			35		
Drain-Source Body Diode Characteris	stics					
Continuous Body Diode Current	I _s	T 0500			1	Δ.
Pulsed Diode Forward Current	I _{SM}	$T_C = 25^{\circ}C$			3	Α
Body Diode Voltage	V _{SD}	$T_J = 25^{\circ}\text{C}, I_{SD} = 1\text{A}, V_{GS} = 0\text{V}$		0.9	1.2	V
Reverse Recovery Time	t _{rr}			35		ns
Reverse Recovery Charge	Q _{rr}	$V_R = 400V, I_F = I_S,$ $di_F/dt = 100A/\mu s$		0.1		μC
Peak Reverse Recovery Current	I _{rrm}	1,		1.4		А

Notes

- 1. Repetitive Rating: Pulse Width limited by maximum junction temperature
- 2. I_{AS} = 0.3A, V_{DD} = 50V, R_{G} = 25 Ω , Starting T_{J} = 25 $^{\circ}$ C
- 3. Pulse Test: Pulse Width ≤ 300µs, Duty Cycle ≤ 1%






Typical Characteristics $T_J = 25^{\circ}\text{C}$, unless otherwise noted

Figure 1. Output Characteristics 1.6 20V 1.4 10V 6V ID, Drain Current (A) 1.2 5.5V 5V 1 4.5V 8.0 0.6 0.4 0.2 0 5 10 15 20 0 V_{DS}, Drain-to-Source Voltage (V)

Figure 3. On-Resistance vs. Drain Current



12 V_{GS}, Gate-to-Source Voltage (V) 10 $V_{DD} = 120V$ 6 $V_{DD} = 480V$ 2 0 0.9 0 0.6 1.2 1.5 1.8 Q_g, Total Gate Charge (nC)

Figure 2. Transfer Characteristics




Figure 4. Capacitance





Figure 6. Body Diode Forward Voltage





Typical Characteristics $T_J = 25^{\circ}C$, unless otherwise noted

Figure 7. On-Resistance vs.




Figure 9. Transient Thermal Impedance TO-220/TO-251/TO-252





Figure 8. Threshold Voltage vs. Junction Temperature



T_J, Junction Temperature (°C)

Figure 10. Transient Thermal Impedance TO-220F






Figure A: Gate Charge Test Circuit and Waveform

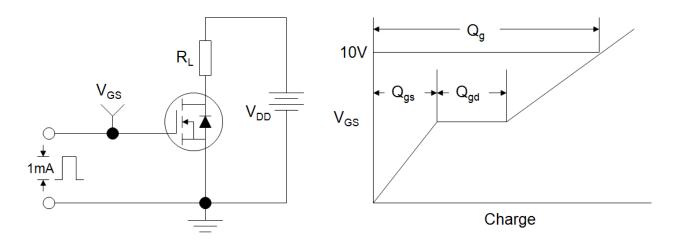


Figure B: Resistive Switching Test Circuit and Waveform


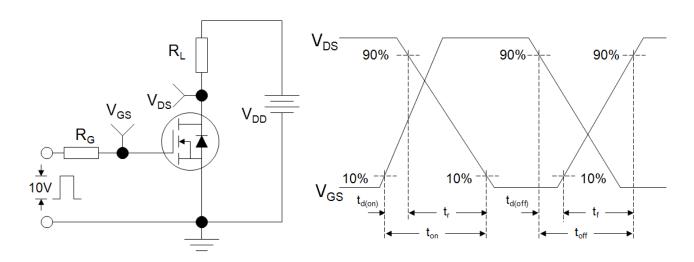



Figure C: Unclamped Inductive Switching Test Circuit and Waveform




V3.0 5 www.tsinghuaicwx.com

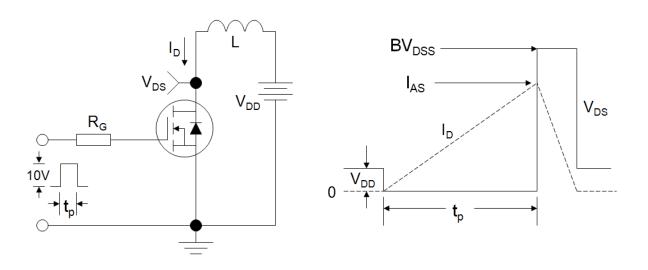

TO-220

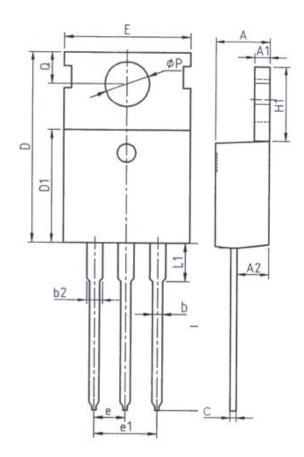


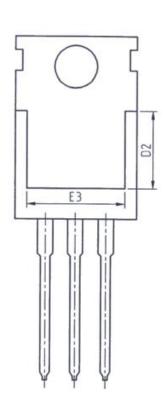


Unit: mm				
Symbol	Min.	Max.		
Α	4. 37	4. 77		
A1	1. 25	1. 45		
A2	2. 20	2. 60		
b	0. 70	0. 95		
b2	1. 17	1. 47		
С	0. 40	0. 65		
D	15. 10	16. 10		
D1	8. 80	9. 40		
D2	5. 50	_		

Unit: mm			
Symbol	Min.	Max.	
E	9. 70	10.30	
E3	7. 00	-	
е	2. 54BSC		
e1	5. 08	BBSC	
H1	6. 25	6. 85	
L	12. 75	13.80	
L1	-	3. 40	
P	3. 40	3. 80	
Q	2. 60	3. 00	






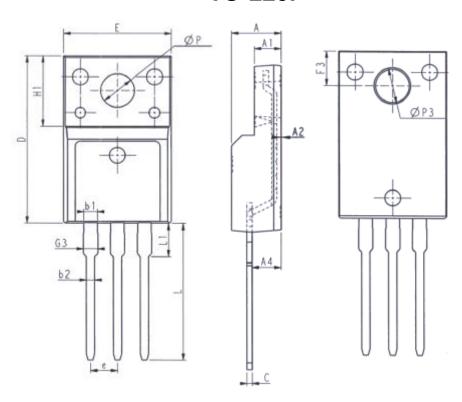

Unit: mm			l	Jnit: mn	1
Symbol	Min.	Max.	Symbol	Min.	Max.
E	9. 96	10.36	L	12. 68	13. 28
Α	4. 50	4. 90	L1	2. 93	3. 13
A 1	2. 34	2. 74	Р	3. 03	3. 38
A2	0. 30	0. 60	Р3	3. 15	3. 65
A4	2. 56	2. 96	F3	3. 15	3. 45
С	0. 40	0. 65	G3	1. 25	1. 55
D	15. 57	16. 17	b1	1. 18	1. 43
H1	6. 70	REF	b2	0. 70	0. 95
е	2. 54	4BSC			




TO-251

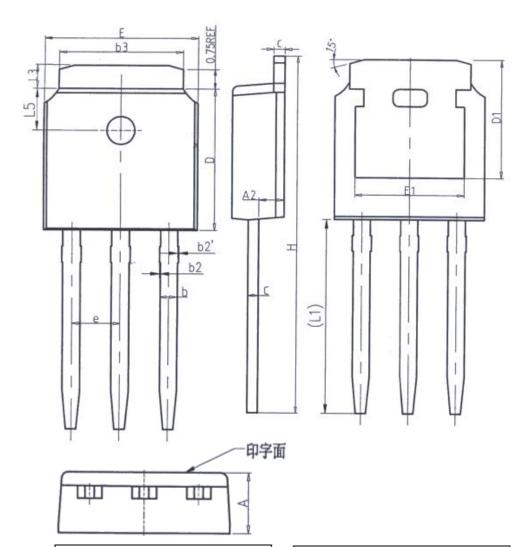

Unit: mm			
Symbol	Min.	Max.	
Α	2. 20	2. 40	
A2	0. 97	1. 17	
b	0. 68	0. 90	
b2	0.00	0.10	
b2′	0.00	0.10	
b3	5. 20	5. 50	
С	0. 43	0. 63	
D	5. 98	6. 22	

Unit: mm			
Symbol	Min.	Max.	
D1	5. 30REF		
E	6. 40	6. 80	
E1	4. 63	-	
е	2. 286BSC		
Н	16. 22	16. 82	
L1	9. 15	9. 65	
L3	0.88	1. 28	
L5	1. 65	1. 95	



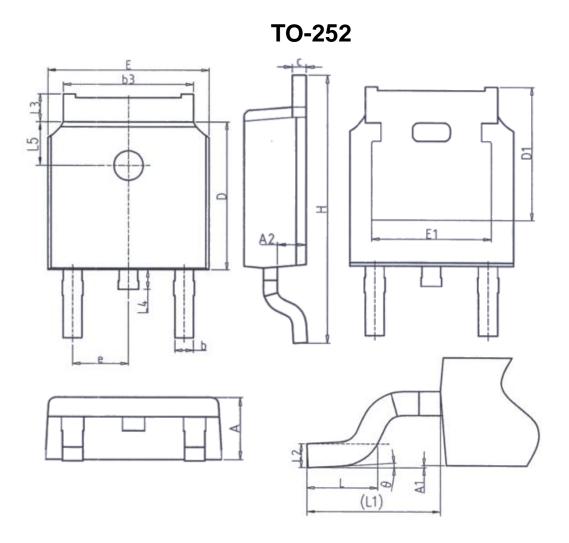

Unit: mm			
Symbol	Min.	Max.	
Α	2. 20	2. 40	
A1	0.00	0. 20	
A2	0. 97	1. 17	
b	0. 68	0. 90	
b3	5. 20	5. 50	
С	0. 43	0. 63	
D	5. 98	6. 22	
D1	REF		
E	6. 40	6. 80	
E1	4. 63	_	

Unit: mm			
Symbol	Min.	Max.	
е	2. 28	6BSC	
Н	9. 40	10.50	
L	1. 38	1. 75	
L1	2. 90REF		
L2	0. 51	IBSC	
L3	0.88	1. 28	
L4	_	1.00	
L5	1. 65	1. 95	
θ	0°	8°	

TPA60R7K5C, TPP60R7K5C, TPU60R7K5C, TPD60R7K5C



Wuxi Unigroup Microelectronics Company

Disclaimer

All product specifications and data are subject to change without notice.

For documents and material available from this datasheet, Wuxi Unigroup does not warrant or assume any legal liability or responsibility for the accuracy, completeness of any product or technology disclosed hereunder.

No license, express or implied, by estoppels or otherwise, to any intellectual property rights is granted by this document or by any conduct of Wuxi Unigroup.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling Wuxi Unigroup products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Wuxi Unigroup for any damages arising or resulting from such use or sale.

Wuxi Unigroup disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Wuxi Unigroup's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

Wuxi Unigroup Microelectronics CO., LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.

In the event that any or all Wuxi Unigroup products (including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.

Information (including circuit diagrams and circuit parameters) herein is for example only. It is not guaranteed for volume production. Wuxi Unigroup believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

V3.0 www.tsinghuaicwx.com